


96 ET Einschraubteil zu Figur 96

- Wird standardmässig als Einzelteil nicht geliefert.

EN	S/V	Dim. Rp [inch]	G...B [inch]	Code	a [mm]	z [mm]
-	S	1/4	5/8		21	11
-	V	1/4	5/8		21	11
-	S	3/8	3/4		25	15
-	V	3/8	3/4		25	15
-	S	1/2	1		28	15
-	V	1/2	1		28	15
-	S	3/4	1 1/4		33	18
-	V	3/4	1 1/4		33	18
-	S	1	1 1/2		38	21
-	V	1	1 1/2		38	21
-	S	1 1/4	2		45	26
-	V	1 1/4	2		45	26
-	S	1 1/2	2 1/4		50	31
-	V	1 1/2	2 1/4		50	31
-	S	2	2 3/4		58	34
-	V	2	2 3/4		58	34
-	S	2 1/2	3 1/2		72	45
-	V	2 1/2	3 1/2		72	45
-	S	3	4		79	49
-	V	3	4		79	49

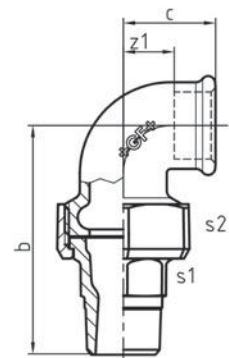

97 Winkelverschraubung, flach dichtend, ISO/EN UA2

- Wird ohne Dichtringe geliefert; b inkludiert die Dichtungsstärke laut Tabelle "Abmessungen der Dichtringe".
- 374 G ... gibt die Gewindegrösse G gemäss ISO 228 der Überwurfmutter 374 an.

EN	S/V	Dim. [inch]	374 G [inch]	Code	b [mm]	c [mm]	z1 [mm]	s1 [mm]	s2 [mm]
•	S	3/8	3/4	770 097 103	65	25	15	19	32
•	V	3/8	3/4	770 097 203	65	25	15	19	32
•	S	1/2	1	770 097 104	79	28	15	23	41
•	V	1/2	1	770 097 204	79	28	15	23	41
•	S	3/4	1 1/4	770 097 105	82	33	18	30	48
•	V	3/4	1 1/4	770 097 205	82	33	18	30	48
•	S	1	1 1/2	770 097 106	93	38	21	36	55
•	V	1	1 1/2	770 097 206	93	38	21	36	55
•	S	1 1/4	2	770 097 107	107	45	26	48	67
•	V	1 1/4	2	770 097 207	107	45	26	48	67
•	S	1 1/2	2 1/4	770 097 108	115	50	31	54	74
•	V	1 1/2	2 1/4	770 097 208	115	50	31	54	74
•	S	2	2 3/4	770 097 109	128	58	34	66	90
•	V	2	2 3/4	770 097 209	128	58	34	66	90