
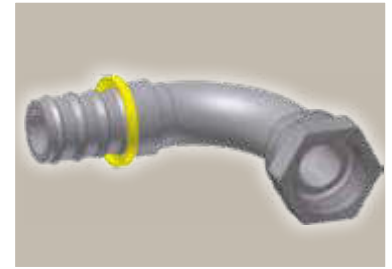


B2 Dichtkopf mit BSP-Überwurfmutter 90° Bogen

BS 5200-B – DKR 90°




Bestell-Nr.	Schlauch ID				Gewinde BSP	A mm	B mm	E mm	W mm
	DN	Zoll	Size	mm					
3B282-4-4	6	1/4	-4	6,4	1/4x19	42	23	29	17
3B282-6-6	10	3/8	-6	9,5	3/8x19	49	26	33	19
3B282-8-8	12	1/2	-8	12,7	1/2x14	60	34	39	27
3B282-8-8B	12	1/2	-8	12,7	1/2x14	60	34	39	27
3B282-10-8	12	1/2	-8	12,7	5/8x14	58	32	40	30
3B282-10-10	16	5/8	-10	15,9	5/8x14	74	37	43	30
3B282-10-10B	16	5/8	-10	15,9	5/8x14	74	37	44	30
3B282-12-12	19	3/4	-12	19,1	3/4x14	83	46	53	32
3B282-12-12B	19	3/4	-12	19,1	3/4x14	83	46	53	32
3B282-16-16	25	1	-16	25,4	1x11	99	63	68	41

Serie 82

D9 BSP-Einschraubzapfen zylindrisch

BS5200 – AGR



Bestell-Nr.	Schlauch ID				Gewinde BSP	A mm	B mm	H mm
	DN	Zoll	Size	mm				
3D982-2-4	6	1/4	-4	6,4	1/8x28	36	17	14
3D982-4-4	6	1/4	-4	6,4	1/4x19	41	23	19
3D982-4-4B	6	1/4	-4	6,4	1/4x19	41	23	19
3D982-4-6	10	3/8	-6	9,5	1/4x19	44	21	19
3D982-4-6B	10	3/8	-6	9,5	1/4x19	44	21	19
3D982-6-6	10	3/8	-6	9,5	3/8x19	45	23	22
3D982-8-8	12	1/2	-8	12,7	1/2x14	53	27	27
3D982-8-8B	12	1/2	-8	12,7	1/2x14	53	27	27
3D982-8-10	16	5/8	-10	15,9	1/2x14	62	25	27
3D982-12-12	19	3/4	-12	19,1	3/4x14	65	28	32

Auch in Edelstahl erhältlich. Details siehe CAT 4400.1/DE

Geprüfte **Armaturenserie** für Schlauchtypen:

B: Messing

82 | 801Plus | 801RH | 804 | 821FR | 830M | 836 | 837BM | 837PU | 838M | 846